


mulí

VERSION EN 25.1


Instruction Sheet Baby Car Seat Adapter

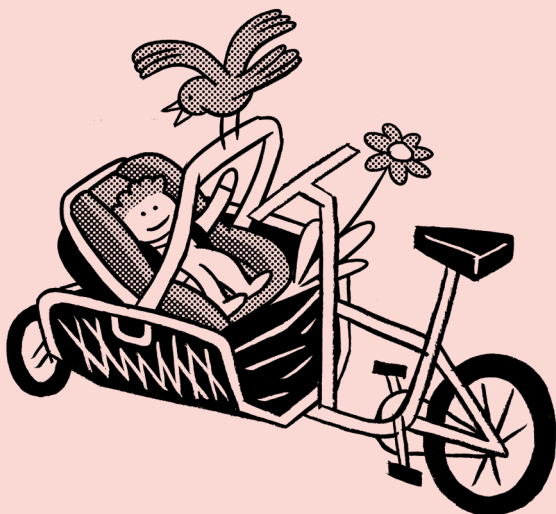

General information

With our new baby car seat adapter, even the little ones can now ride in the muli. The baby car seat adapter can easily be clicked into the holder in the basket. To ensure that the basket remains foldable if you want to drive on without the baby car seat, the holder can be removed quickly and without tools using the Fidlock fastener.

Instruction Sheet

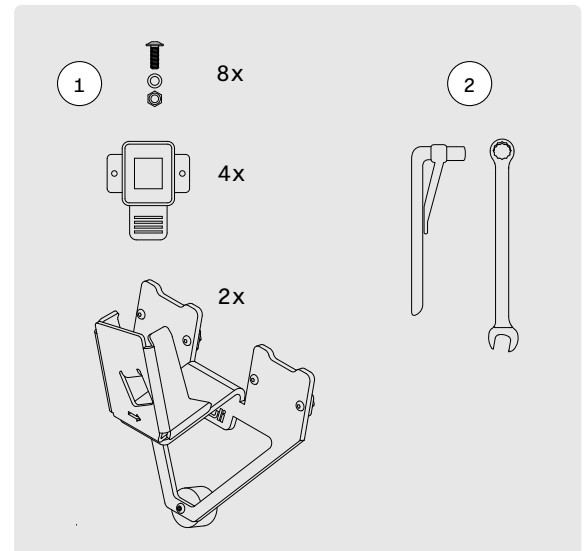

SCOPE OF DELIVERY:

- 1 x Adapter left side
- 1 x Adapter right side
- 4 x Fidlock fastener
- 8 x M4 pan-head screw M4
- 8 x M4 self-locking nut + washer

TOOLS REQUIRED:

- 1 x Hexagon socket 2.5 mm
- 1 x muli torque spanner
- 1 x Clé plate 7 mm




Text types used / Lists

This manual uses the following text types and lists:


- 1 Instructions (in a fixed order)
- Instructions (in any order)
- List

Used symbols / Labels


This Manual uses the following symbols resp. labels:

-  The warning triangle in conjunction with the word “WARNING” indicates risks that can lead to serious personal injury or even death.
-  The warning triangle in conjunction with the word “CAUTION” indicates risks that can lead to minor personal injury and damage to property.
-  The circled exclamation mark indicates important additional information.


Safety instructions

 **WARNING! Risk of injury**
Transporting small children in your muli without the safety belt of the infant carrier fastened can lead to serious injuries.


- Always fasten the safety belt of the baby car seat when transporting your child in the baby car seat in the muli.

 **WARNING! Risk of injury**
A baby car seat adapter that is not correctly locked in place can come loose during the drive and cause serious injury.

- Always make sure that the baby car seat is correctly locked in place.

 **WARNING! Risk of injury**
Never transport small children with a damaged baby car seat adapter.

- Before every ride, check the condition of the bracket and the screw connections for strength and integrity.

 **CAUTION! Risk of injury**
Aggressive or fast driving can lead to permanent injuries due to the resulting vibrations.

- Always drive carefully and with foresight. Avoid sharp bumps in the road, such as driving over kerbs, driving through potholes and sudden braking.

Intended Use

The baby car seat may only be fitted in the holder against the driving direction.

Attaching it in driving direction is prohibited and can lead to injuries in the event of heavy braking or a collision, as no backrest can absorb the forces.

The maximum load of 15 kg must not be exceeded.

Compatibility

The infant car seat adapter is compatible with all standard infant car seats that have the corresponding side mount.

NOTE! Please note that the positioning of the Fidlock fasteners shown in the instructions is optimised for use with the infant car seats from the following manufacturers:

- Maxi Cosi
- Cybex

When using infant car seats from other manufacturers, the position of the Fidlock fasteners on the perforated plate may need to be slightly offset on the horizontal line.

Instruction Sheet

- 1 Determine the hole position for the first Fidlock lock according to the position shown in Fig. 1. position. (Fig. 1)
- 2 Insert the first screw from the outside through the correct hole. Now put on the Fidlock fastener and insert the second screw through the corresponding hole.
- 3 Place the washers and self-locking nuts on the screws from the inside.
- 4 Tighten the bolts with the torque wrench with 2.5 mm bit and the open-end wrench with 1.5 Nm. (Fig. 2)
- 5 Repeat the process for the second fastener. The distance to the second fastener is 9 holes (first screw of the second fastener in the ninth hole) – see Fig. 1.

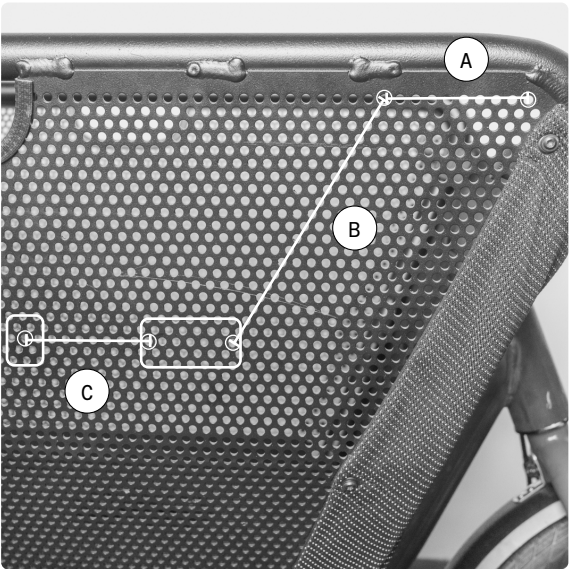


FIG.1

A	10 HOLES
B	21 HOLES
C	9 HOLES

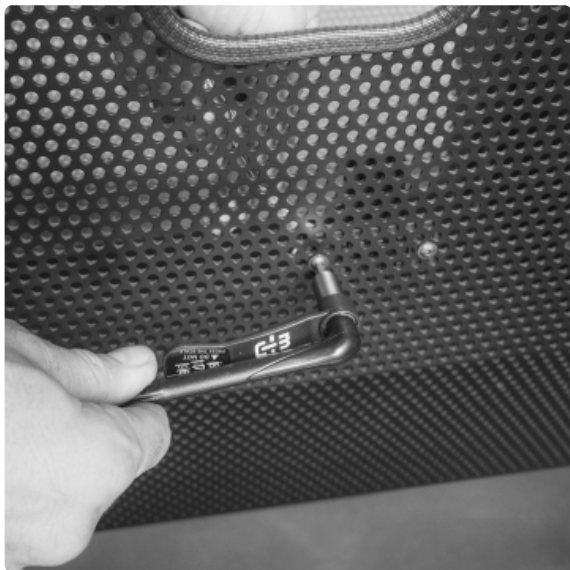


FIG. 2

- 6 Repeat the process on the other basket wing.
(Fig. 3)

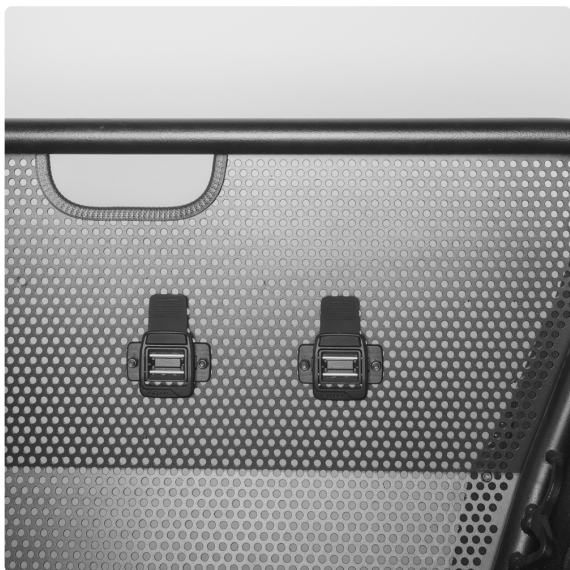


FIG. 3

Attaching the adapter to the basket

- 1 Insert a locking bar into the front of the basket to prevent the basket from closing unintentionally. (Fig. 4)



CAUTION! Risk of injury

The use of the infant car seat adapter in a basket without a built-in locking bar can lead to injuries.

- Only use the infant car seat adapter in a basket with a built-in locking bar.

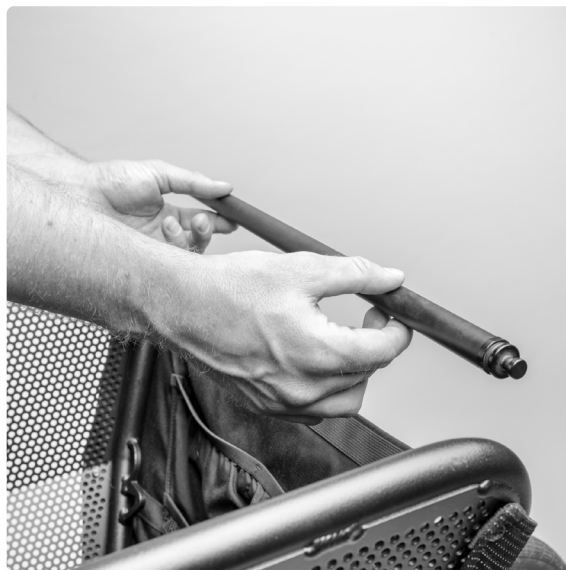


FIG. 4

- 2 Slide the lower side of the baby car seat adapter into the Fidlock retaining plate. Then click the holder firmly into the lock. The arrow on the adapter must point in the direction of travel. (Fig. 5)
- 3 Make sure the bracket is clicked in correctly by pressing it firmly again at the height of the fasteners. (Fig. 6)

**WARNING! Risk of injury**

A baby car seat adapter that is not properly engaged can lead to accidents.

- Make sure that both Fidlock fasteners are fully engaged before every ride. Only transport children with the infant car seat firmly locked in place.



FIG. 5

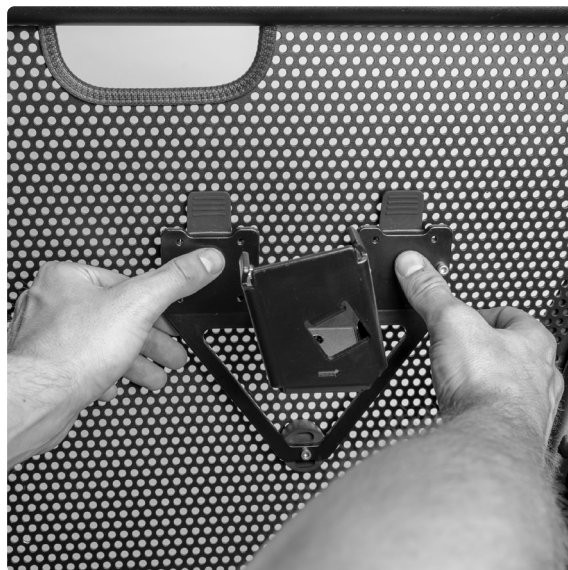


FIG. 6

Fastening the infant car seat in the adapter

- 1 First set the baby car seat retaining bar to the top position.

This position makes it easier to insert the baby car seat into the holder and also serves as additional protection. (Fig. 7)

- 2 Insert the baby car seat into the holder from above in the opposite direction of travel. To do this, slide the baby car seat into the holder from above on both sides using the two middle attachment points. You will hear a clicking sound when it clicks into place. (Fig. 8)

⚠ NOTE! In order to absorb road shocks more effectively for the infant car seat, you can reduce the air pressure in the front tyre to the minimum pressure specified by the manufacturer. You will find the recommended minimum air pressure directly on the wheel.




FIG. 7



FIG. 8

- 3 To ensure that the baby car seat is correctly connected to the holder, pull the car seat upwards by the handle. It must remain firmly attached to the holder. (Fig. 9)

 **WARNING! Risk of injury**
A baby car seat adapter that is not properly engaged can lead to accidents.

- Make sure that both Fidlock fasteners are fully engaged before every ride.
Only transport children with the infant car seat firmly locked in place.



FIG. 9

Removing the baby car seat from the holder

- 1 Press the two release buttons on the left and right of the baby car seat at the same time. Then pull the car seat up and out of the holder.

The position of the two release buttons may vary from baby car seat to baby car seat. (Fig. 10)



FIG. 10

Removing the bracket from the basket

- 1 Pull the two tabs of the Fidlock bracket upwards at the same time. It is best to position yourself opposite the bracket as shown in Fig.11. (Fig. 11)
- 2 While holding both tabs up, pull the bracket towards you. (Fig. 12)
- 3 That's it! You can now remove the adapter and close the basket as usual.

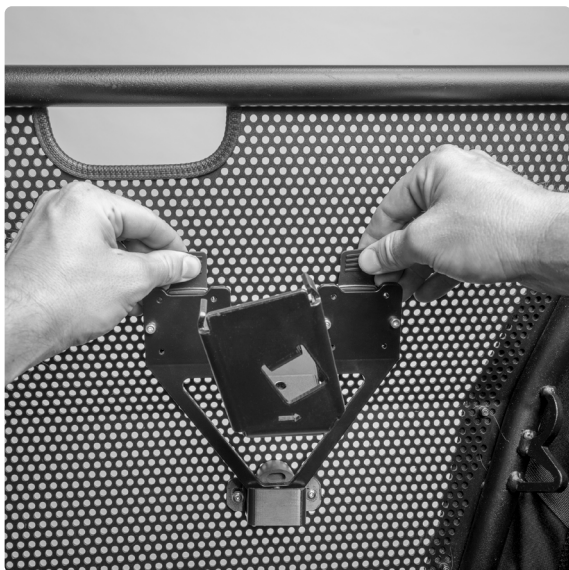


FIG. 11

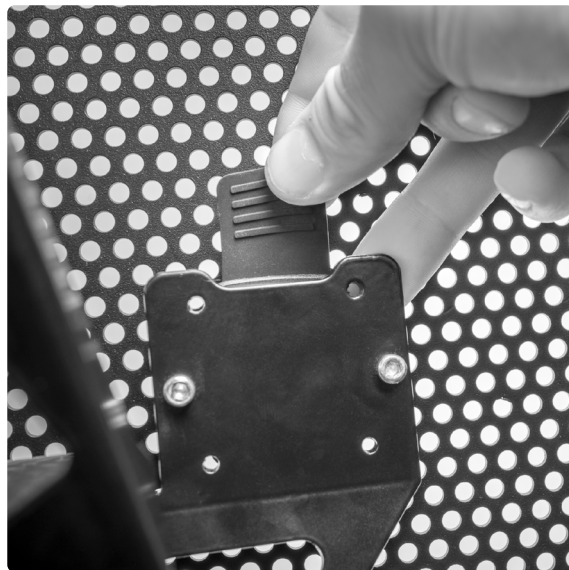


FIG. 12

Imprint

BA-EX-13V25.1
©muli cycles GmbH

Widdersdorfer Str. 190
50825 Köln

Content
muli cycles GmbH

Photography
Martin Lamberty

Illustration
Markus Färber

Graphic design
Friederike Wolf, Frieder Oelze

